

For Earth, For Life
Kubota

KUBOTA DIESEL TRACTOR

L

L3608

Equipped with highly dependable rotary tillers made by Kubota, this specially designed rice paddy tractor delivers a high level of performance.



SPECIFICATIONS

Dimensions	Overall Length	mm	2920	
	Overall Width	mm	1430	
	Wheelbase	mm	1610	
	Ground Clearance (Lowest Point)	mm	355	
Weight		kg	1115	
Engine	Maker		Kubota	
	Country of Manufacturer		Thailand	
	Model		D1703-M-DI	
	Type		Direct Injection, Vertical, Water-Cooled 4-Cycle Diesel	
	Engine Gross Power	hp (kW)	35.5 (26.5)	
	Rated Engine Speed	rpm	2700	
	Maximum Torque	ISO TRI 4396 N-m@rpm	111	
	Number of Cylinders		3	
	Bore x Stroke	mm (in)	87 x 92.4 (3.43 x 3.64)	
Displacement	cc (cu in)	1647 (100.47)		
Power Take-Off (PTO)	Type		SAE 1-3/8	
	PTO Power	hp (kW)	31.1 (23.2)	
	Number of PTO Shaft Spline		6	
	PTO Speeds @ Engine Speed		540 (2430), 750 (2596)	
Fuel System	Fuel Tank Capacity	L	38	
Electrical System	Battery	V	12	
Travelling System	Clutch	Type	Dry Type Single Stage	
		Type	Gear Shift	
	Transmission	Number of Forward Speeds		8
		Number of Reverse Speeds		8
		Shuttle		Synchro-Shuttle
		Road Speed Range (Min. - Max.)	km/h	1.2 - 18.8
	Steering	Type	Integral Type Power Steering	
Brake	Type	Wet Disc		
Turning Radius	With Brake	m	2.5	
Hydraulic System	Main (Implement) Pump Flow	L/min	23.9	
	3-Point Linkage, Category		Category I	
	Maximum Lift Capacity	@ Ball Ends with Arms Horizontal	kg (lbs)	906 (1993.2)
		@ 610 mm (24 in) Beyond Ball Ends	kg (lbs)	651 (1432.2)
Lift Controls (Draft, Position, and/or Mix)			Position Control	
Agricultural Tire Size and Ply Rating	Front		8 - 16	
	Rear		12.4 - 24	




**FD163E
FRONT DOZER**

SPECIFICATIONS OF FD163E FRONT DOZER

Model		FD163E
Length	mm	1615
Width	mm	460
Weight	kg	364
Blade Position		Hydraulic Control with Tractor
Control System		Control Valve

SPECIFICATIONS OF KRX164 ROTARY TILLER

Model			KRX164
Dimensions	Width		1793
	Length	mm	830
	Height		1080
Weight	With Joint	kg	271
Blade Type			Flange
Number of Blade		pcs	32
Tilling Width		mm	1558
Blade Shaft Rotation		rpm	220 (PTO 540), 308 (PTO 750)

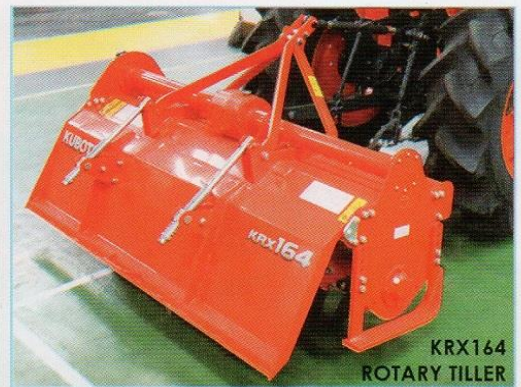

**KRX164
ROTARY TILLER**

KUBOTA Philippines, Inc.

Manila Head Office:

232 Quirino Highway, Baesa, Quezon City, Metro Manila
Tel. Nos.: (632) 4223500 to 03; Fax Nos.: (632) 4223504 to 05
E-mail: kpi_g.kpi@kubota.com

Davao Branch:

1 Yuta@Dabaw Bldg., Purok 38, Diversion Road, Ma-a, Davao City 8000
Tel. Nos.: (082) 2828160 to 61

Website: www.kubota.com.ph

Authorized Dealer: